




Technical Information


The Predator ES series are an Absorbent Glass Mat (AGM) battery designed for general purpose & standby applications including UPS, communication & security systems. Their ActivFire certification makes them an excellent choice for fire panel applications.

The valve regulated, non-spillable design delivers outstanding cycle life and a low self discharge rate. The Predator ES series are manufactured in a facility which is ISO 9001, 14001 & 45001 certified.

For deep cycle applications, the Predator ED series are recommended.



T1 Terminal
Unit: mm [inches]




Features & Benefits



- ActivFire Certified
- Heavy Duty, Non-Spillable Design
- Glass Mat Separator Construction
- High Energy Density
- Low Self Discharge
- 5 years design life (@25°C)

Float Service Life @ 25°C

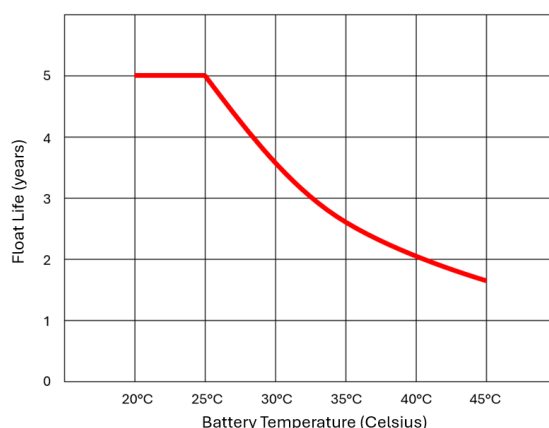

Technical Specifications

Battery Type	General Purpose AGM	Case Material	ABS
Voltage	6V	Case Colour	Blue Case, White Lid
Capacity (20 / 10 / 5Hr)	12 / 11.2 / 10.2Ah	Charge Current	Recommended: 1.2A Maximum: 3.0A
Internal Resistance (25°C)	Approx. 9mΩ	Charge Voltage	7.05 – 7.20V @25°C (Temp. Coeff. -30mV/°C)
Overall Size (LxWxH ±2mm)	151 x 50.5 x 100mm	Float Voltage	6.75 – 6.90V @25°C (Temp. Coeff. -20mV/°C)
Nominal Weight	1.6kg	Operating Temp. Charge	0 to 40°C
Max Discharge Current (5s)	180A	Operating Temp. Discharge	-15 to 50°C